



ABOVE-GROUND
AUTOMATIC SLATTED COVER

ROLLOVER



**STRENGTH
SAFETY**

ABOVE-GROUND
AUTOMATIC SLATTED COVER
ROLLOVER




ROLLOVER
ELECTRIC PVC



ROLLOVER
ELECTRIC IPE



ROLLOVER
SOLAR PVC

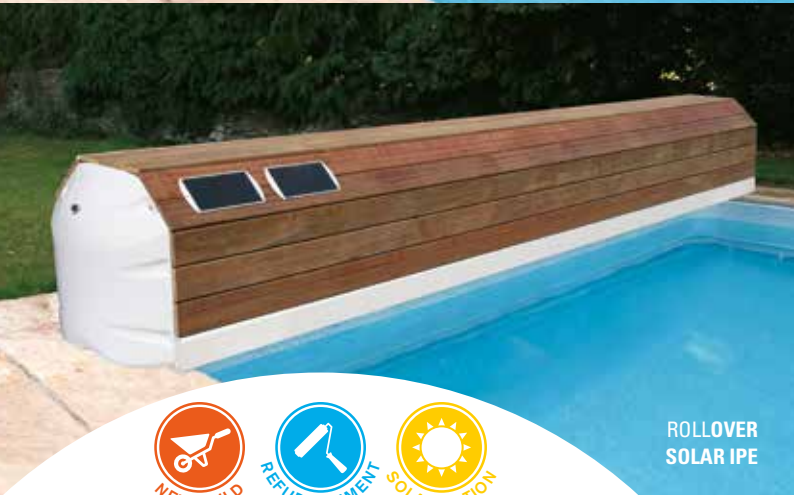


ROLLOVER
SOLAR IPE



SPECIFICATIONS

For pools from 2.5 x 3 m up to 7 x 14 m (step included). Available in electric or solar versions.

- 1 Housing made of white PVC or IPE wood slats.
- 2 Structure: 316 L stainless steel hoops.
- 3 Flask: white lacquered aluminium end-flanges.
- 4 Electric 24 V DC tubular motor.
The motor can be uncoupled and removed.
Automatic stop (torque limiter): used to stop the cover opening if an abnormal strain is detected on it.
- 5 Solar version: solar panels fitted with photovoltaic cells.
- 6 Cover composed of opaque PVC slats or polycarbonate solar slats fitted with safety locking kits. Slats available in several colours for perfect matching with your environment.
- 7 **Pushlock locking kit system**
Flexible stainless steel weight: in case you forgot to unlock the Pushlock when opening the cover, the material damage is reduced.

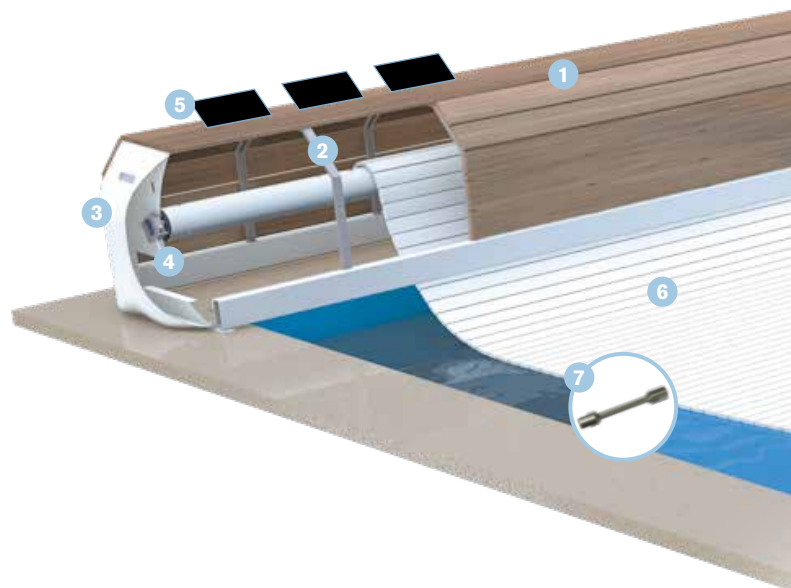



THE **ROLLOVER** ABOVE-GROUND AUTOMATIC SLATTED COVER IS SPECIALLY ADAPTED FOR LARGE POOLS. AVAILABLE IN ELECTRIC OR SOLAR VERSIONS, IT PERFECTLY PROTECTS THE COVER THANKS TO ITS PVC OR IPE PROTECTION.

STRENGTH

The ROLLOVER above-ground automatic slatted cover has a powerful tubular motor and is perfectly suited to large pools. Its solar version requires no works and is perfectly suited to refurbishment projects. Its 316 L grade stainless steel structure and its thermoformed ABS finishes make it an especially robust above-ground automatic cover.

SAFETY

As all DEL covers, ROLLOVER is certified by the French National Test Laboratory and is compliant with standard NFP 90-308 relative to the French pool safety Act. Composed of opaque PVC or polycarbonate solar slats and locking kits, it enables to completely close the pool, preventing access by children under 5.

ECO-RESPONSIBLE

Covering your pool with a ROLLOVER safety cover limits evaporation, which is the cause of drops in water levels, while maintaining the pool temperature and limiting external pollution. Its solar version stores energy in two batteries (rechargeable if necessary). Combined with its polycarbonate solar slats, it is the guarantee of 100% economic operation.



THE WIRELESS REMOTE CONTROL BOX



- Pool opening and closure information is sent using digital wireless communications.
- No connections or cable passages.
- An aesthetic and watertight control box for indoor or outdoor installations.
- Use secured by a password and compliant with the NF P 90-308 safety standard.





ABOVE-GROUND AUTOMATIC SLATTED COVER ROLLOVER


SLATS



Polycarbonate solar slats

Compliant with the NF P 90-308 standard (DEL exclusivity)
Available in 6 colours: crystal black, crystal blue, crystal green, crystal, crystal brown and silver black*

*Norm in process.



Opaque PVC slats

Compliant with the NF P 90-308 standard
Available in 4 colours: grey, white, beige, blue



IVERNEA / IVERNEA PLUS

Remember to order your **winter shield Ivernea** or your **4 seasons protective covering Ivernea Plus** to protect the cover from UVs and dirt.

MAXIMUM SAFETY

An essential addition to DEL covers, the safety kits ensure the complete closure of your pool. A wide range of colours makes it possible to match the kits to your coating colour.

Ask your pool professional for advice.



The purpose of DEL safety covers is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children. DEL automatic covers are safety covers designed to prevent children under 5 years old from accessing the pool. A child can drown under in 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult.

For more information about these products ask your pool professional for advice.

Distributor's stamp

Please read carefully and keep in a safe place.

Rolover is a pool safety cover designed to prevent children under 5 years old from accessing the pool. This product complies with the NF P 90-308 standard. It is not a substitute for common sense or personal responsibility. The purpose of this cover is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children. A child can drown in under 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult. **Guarantee:** 3 years for the slats and motorization, 2 years for the roller in compliance with our general sales terms and conditions. Order form: For the cover to be correctly fitted to the pool it is essential to supply a drawing of the pool with measurements taken every metre. In compliance with standard NF P 90-308, the gap between the inside of the pool and the edge of the cover must be less than 70 mm. **Manoeuvre time:** 3 minutes for automatic opening or closure plus 30 seconds to lock or unlock the safety locking system. Rolover can be opened and closed by a single person. **Use:** in all seasons. For correct operation maintain a constant water level corresponding to normal pool filtering. It is essential to fit a water level regulator. The water level must be compliant with the instructions. **Use limitations:** the installation of an automatic DEL cover on overflow pools and/or pools with steps on the length side (removable steps on the side) is not compliant with standard NF P 90-308. In this case please use other compliant equipment. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with DEL automatic covers. **Wintering:** close the pool for winter depending on the geographic location. Without lowering the water level, close the cover in the safety position and eventually install a wintering net to protect the cover. If the water level is dropped to put the parts to insert above the water line, roll the cover and secure the pool using a safety wintering cover. **Packing list:** for 5 x 10 m pool. Slats: 5 packs of 5.10 x 0.25 x 0.20 m. Tube 1 pack of 5.84 x 0.75 x 0.85 m. Weight: 416 kg.

Manufacturer: DEL La Basse Croix Rouge 35530 BRECE - France / export@fija-group.com / www.del-piscine.fr.