

# Securiwall

A solid and hard wearing  
safety wall

For pool up to 7.03 m wide and 1.57 m deep.

This wall avoids the access of the cover pit from the pool.

- Innovative design and raw material.
- Perfect finishing and excellent resistance.
- Essential for automatic covers Rollin, Rollkit and Motorin.

## Securiwall concept

- The frame is made of white composite material reinforced with fibreglass. Perfect finishing and an unique resistance, thanks to the edge profile: more than a panel, it is a real safety wall.
- Made of PVC panels 40 mm thick PVC panels.
- The securiwall is designed for all types of pool: under construction, renovation, concrete pools, fibreglass or panels pools (with concrete reinforcement for install the supports).

### Advantages of the reinforced fibreglass:

- Excellent resistance to corrosion.
- High strength.
- Reduced weight.
- Resistance to chemicals.
- Resistance to UV rays and to time.
- The wall can be mounted and dismantled without taking the coping stones off.

### Easy and quick installation


- The safety wall is delivered mounted, ready to be installed on supports.
- The supports are made of 316 L stainless steel, white lacquered, and are installed in the pool wall above the waterline (like **Motorin** supports).
- The supports are set behind the wall, cover pit side.
- On the supports you can install the beam supports.

Please ask your pool builder

### Important notification

No safety system will replace the supervision of the parents and or responsible adults.  
Never let a child alone near the pool even one moment.

Assembling

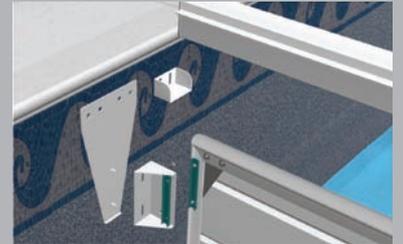

Cover pit side view



Pool side view



Pool Solutions

**CUSTOMER INFORMATION:** Read carefully and keep it for a later consultation. This wall avoids the access of the cover pit from the pool. **Manufacturing sheet:** You need to fill in the order form to install the Safety wall. **Use limits:** The Securiwall cannot be installed in a hopper or slope pool. It is adapted for pool up to 7.03 m wide and from 0.75 to 1.57 m deep. It is conceived for aluminium beams of 120x100 mm with surface mount beam supports. **Guarantee:** 2 years on manufacturing defects. **Packing details:** for a pool of 5.03 m width x1.57 m deep - The wall: 1 parcel 503x127x12 cm - Spare parts: 76x28x11 cm - Total weight: 80 kg. **Manufacturer:** DEL - La Basse Croix Rouge 35530 BRECE - France. Tél.: +33 2 99 00 17 72 - E-mail del.export@delbrece.fr - <http://www.delbrece.fr>.