



IN-GROUND
AUTOMATIC SLATTED COVER
ROLLFIT



**INTEGRATION
VERSATILITY
DISCRETION**

IN-GROUND
AUTOMATIC SLATED COVER


ROLLFIT



SPECIFICATIONS

For pools from 2.5 x 3 m up to 6 m wide.
Suitable for pools with tiling, a reinforced membrane or a liner.

- 1 2 motorisations available: in a dry pit for easier maintenance or a tubular motor insert mount version especially adapted to refurbishment. 120, 250, 500 or 750 Nm motors depending on the pool size and depth. Remotely controlled by Wi-Key, the remote wireless control box or by key-switch button.
- 2 Stainless steel tube available for a perfect aesthetic finish (optional).
- 3 Vertical decking to customise using the reinforced 150/100th membrane of your choice.
- 4 Cover equipped with opaque PVC slats or polycarbonate solar slats fitted with safety locking kits. Slats available in several colours for perfect matching with your environment.
- 5 **Pushlock locking kit system**
Flexible stainless steel weight: in case you forgot to unlock the Pushlock when opening the cover, the material damage is reduced.

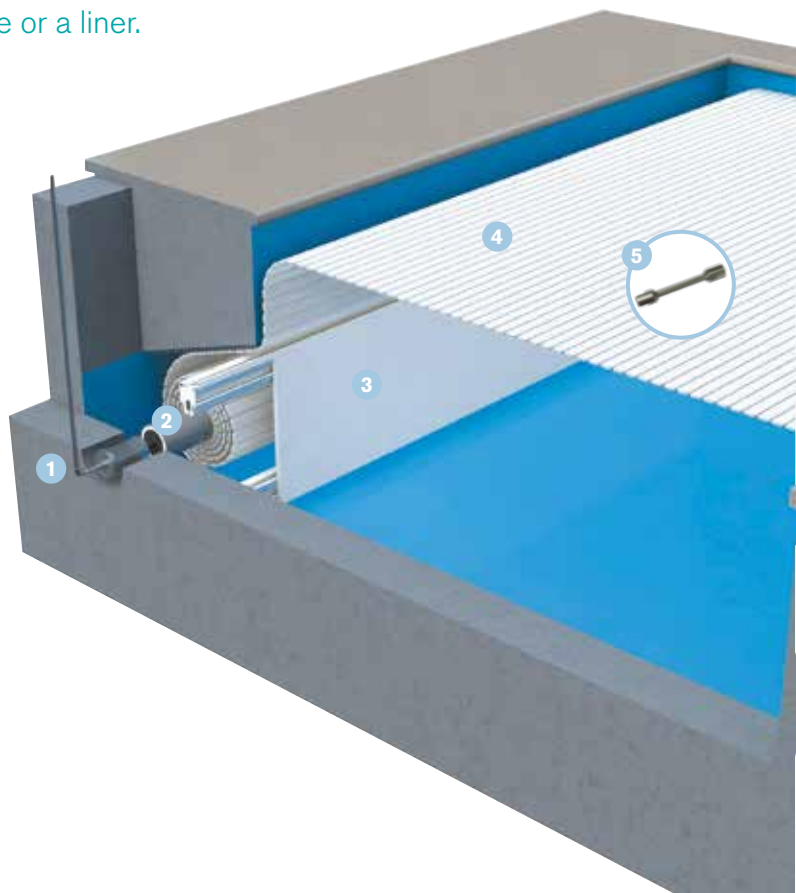



ROLLFIT IS AN AUTOMATIC SLATTED COVER THAT IS CLEVERLY HIDDEN IN A HOUSING BEHIND IMMERSSED DECKING. BUILT INTO THE POOL BOTTOM, IT MAINTAINS THE POOL'S ELEGANCE AND PURITY OF LINES WHILE GUARANTEEING OPTIMAL OPERATION AND PERFECT PROTECTION WHEN DEPLOYED.

INTEGRATION

Rollfit's patented decking fixing system enables to perfectly build the cover into the pool bottom. Very discrete, it is hidden behind a customisable decking and perfectly blends with the pool's style and environment.

VERSATILITY

Rollfit is fully compatible with new build projects or refurbishments, thanks to its tubular motorisation and its decking system. Suitable for pools with tiled, reinforced membrane or liner coverings, it is available with two types of motorisation.

ECO-RESPONSIBLE

Covering your pool with a Rollfit automatic slatted cover limits evaporation, which is the cause of drops in water levels, while maintaining the pool temperature and limiting external pollution. Available with a polycarbonate solar cover, Rollfit enables to make significant energy savings.



THE WIRELESS REMOTE CONTROL BOX



- Pool opening and closure information is sent using digital wireless communications.
- No connections or cable passages.
- An aesthetic and watertight control box for indoor or outdoor installations.
- Use secured by a password and compliant with the NF P 90-308 safety standard.




Grey PVC slats



IN-GROUND
AUTOMATIC SLATTED COVER

ROLLFIT

SLATS



Polycarbonate solar slats

Compliant with the NF P 90-308 standard (DEL exclusivity)
Available in 6 colours: crystal black, crystal blue, crystal green, crystal, crystal brown and silver black*

*Norm in process.



Opaque PVC slats

Compliant with the NF P 90-308 standard
Available in 4 colours: grey, white, beige, blue



IVERNEA / IVERNEA PLUS

Remember to order your **winter shield Ivernea** or your **protective covering Ivernea Plus** to protect the cover from UVs and dirt.

MAXIMUM SAFETY

An essential addition to DEL covers, the locking kits enable to guarantee the complete closure of your pool. A wide range of colours makes it possible to match the kits to your coating colour. Ask your pool professional for advice.



For more information
about these products ask your
pool professional for advice.

Distributor's stamp

The purpose of DEL safety covers is not to replace the vigilance of parents and/or responsible adults, which remains the essential factor for the safety of young children. DEL automatic slatted covers are safety covers designed to prevent children under 5 years old from accessing the pool. A child can drown in under 3 minutes: no type of protective measure can replace the monitoring and vigilance of a responsible adult.

Please read carefully and keep in a safe place.

Guarantee: 5 years for tubular motor, 3 years for the dry fit motor and slats and 2 years for the roller. **Manufacture sheet:** for the cover to be correctly fitted to the pool it is essential to supply a drawing of the pool with measurements taken every metre. **Manoeuvre time:** 3 minutes for automatic opening or closure and 30 seconds to lock or unlock the locking kits. Rollfit can be opened and closed by a single person. **Use:** in all seasons. For correct operation maintain a constant water level corresponding to normal pool filtering. It is essential to fit a water level regulator. The water level must be compliant with the instructions. **Wintering:** close the pool for winter depending on the geographic location. Without lowering the water level, close the cover in the safety position and eventually install a wintering net to protect the cover. If the water level is dropped to put the parts to insert above the water line, roll the cover and secure the pool using a safety wintering cover. **Packing list:** for 5 x 10 m pool. Slats: 5 packs of 5.10 x 0.25 x 0.20 m. Tube: 1 pack 4.948 x Ø 0.20 m. Beams: 2 packs of 4.06 x 0.15 x 0.15 m. Decking: 1 pallet 1.20 m x 1.00 m x 0.50 m. Motorisation kit: 1 pack of 0.62 x 0.35 x 0.35 m. Beam support: 1 pack of 0.75 x 0.25 x 0.15 m. Wall units: 1 pack of 1.00 x 0.20 x 0.20 m. Weight: 350 kg.

Manufacturer: DEL La Basse Croix Rouge 35530 Brécé - France / export@fija-group.com / www.del-piscine.fr